

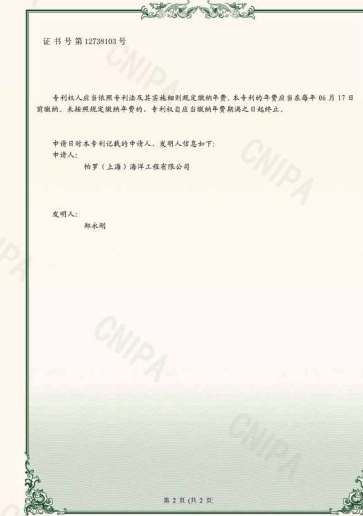







PW OFFSHORE

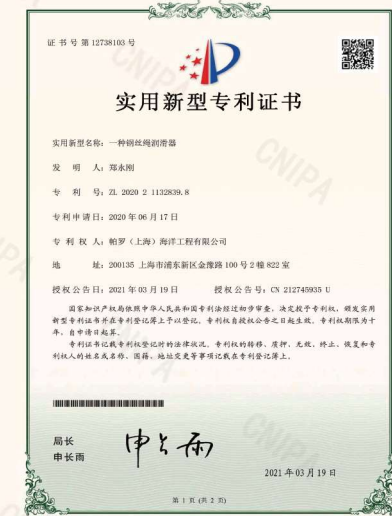

Wire Ropes

特种钢丝绳

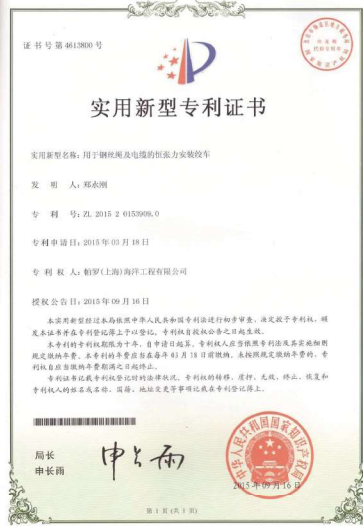

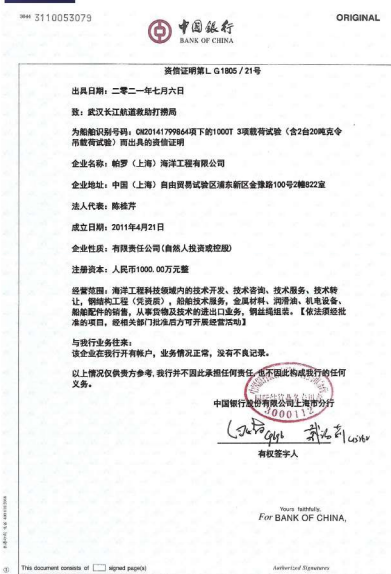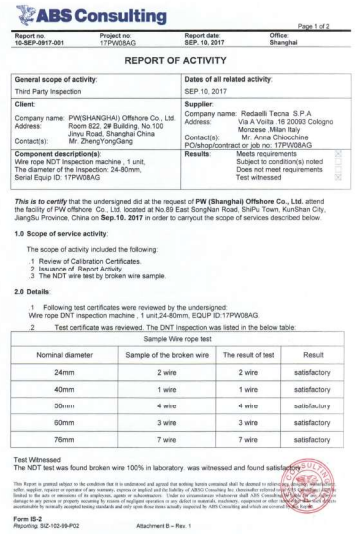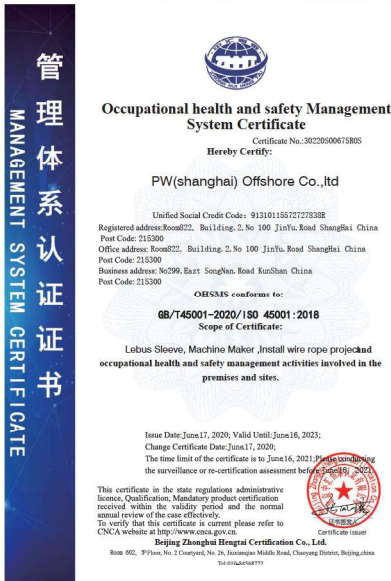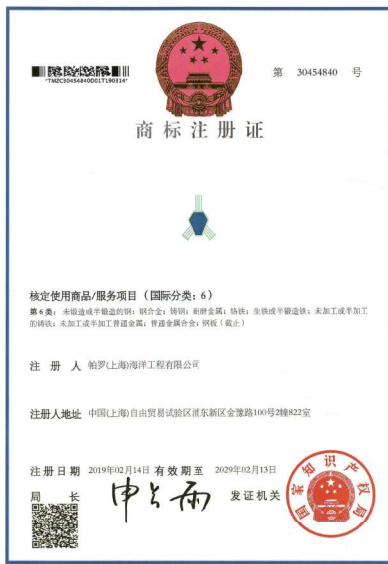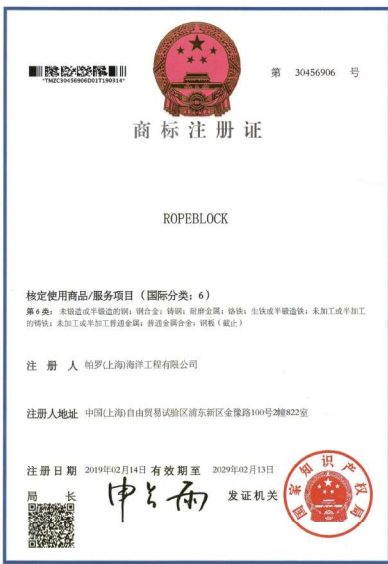


起升钢丝绳型号Hoisting wire :

PW4K-4xk36  6

PW16K-35w x K7  7

PW18K-37WxK7  8

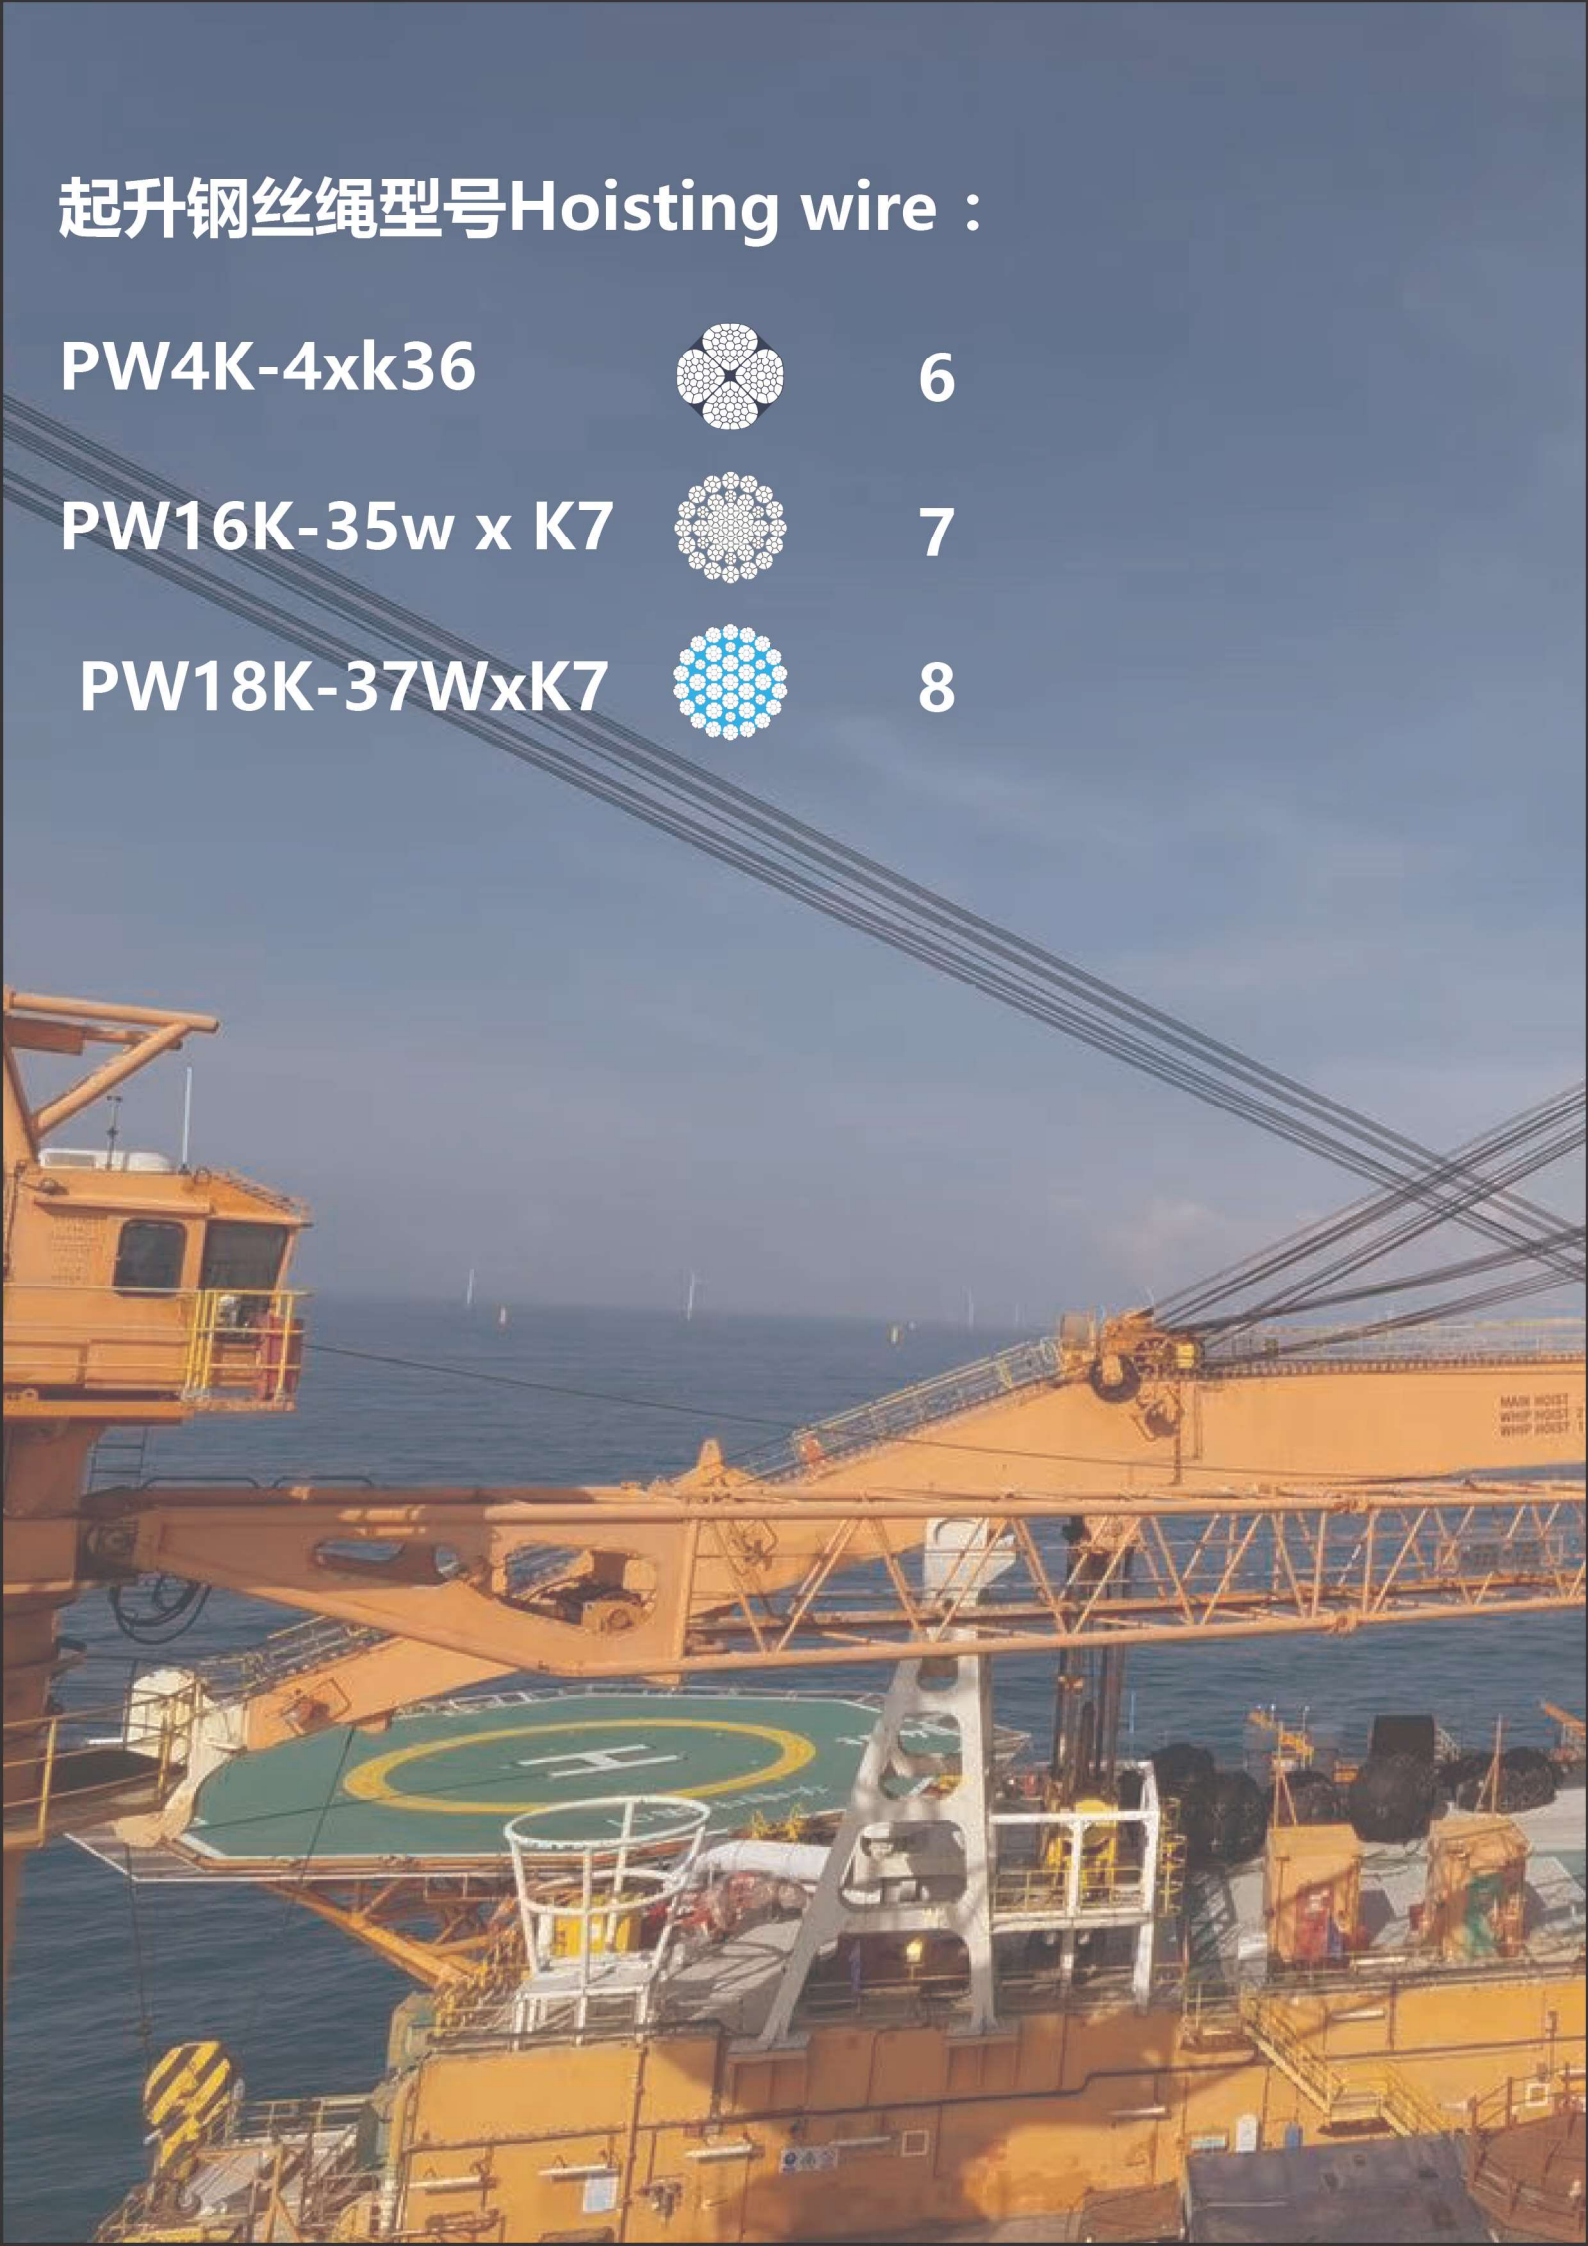

变副钢丝绳型号Luffing wire:

PW6R-6x36



9

PW8R-8x26



10

PW6K-6xK36




11

PW8K 8xK26



12



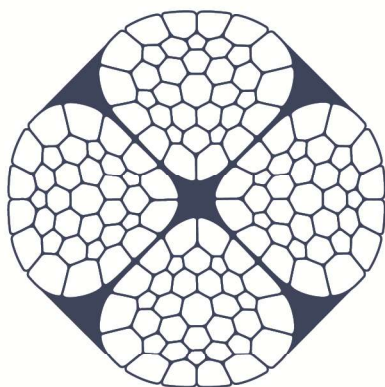

PW 4K有很高的破断拉力和结构稳定性

PW 4K have very high breaking force and structural stability.

钢丝绳完全润滑，可由镀锌和非镀锌的钢丝制成

The wire rope is fully lubricated, it can be made from galvanized and non galvanized wire.


与卷筒间有极好的抗挤压性

It has excellent extrusion resistance with the drum.


半抗旋转钢丝绳，应配合应力释放器使用

No rotation wire rope, shall be used with Swivel.

钢丝绳 公称直径		直径公差		外层丝 直径	公制单位				
					单位 重量	最小破断力			
		最小	最大			1960级	2160级		
mm	inches	mm	mm	mm	kg/m	kN	t(M)	kN	t(M)
8		8.16	8.32	0.59	0.270	55.90	5.70	59.70	6.09
9		9.18	9.36	0.67	0.341	70.80	7.22	75.50	7.70
10		10.20	10.40	0.74	0.421	87.40	8.91	93.20	9.50
11		11.22	11.44	0.82	0.510	105.8	10.79	112.8	11.50
12		12.24	12.48	0.89	0.607	125.9	12.84	134.3	13.69
12.7	1/2	12.95	13.21	0.94	0.679	141.0	14.38	150.4	15.34
13		13.26	13.52	0.97	0.712	147.7	15.06	157.6	16.07
14		14.28	14.56	1.04	0.826	171.3	17.47	182.7	18.63
14.3	9/16	14.59	14.87	1.06	0.861	178.8	18.23	190.7	19.45
15		15.30	15.60	1.12	0.948	196.7	20.06	209.8	21.39
15.9	5/8	16.22	16.54	1.18	1.065	221.0	22.54	235.7	24.03
16		16.32	16.64	1.19	1.078	223.8	22.82	238.7	24.34
17		17.34	17.68	1.26	1.217	252.6	25.76	269.5	27.48
18		18.36	18.72	1.34	1.365	283.2	28.88	302.1	30.81
19.1	3/4	19.48	19.86	1.42	1.537	318.9	32.52	340.1	34.68
20		20.40	20.80	1.49	1.685	349.7	35.66	373.0	38.04
21		21.42	21.84	1.56	1.858	385.5	39.31	411.2	41.93
22		22.44	22.88	1.64	2.039	423.1	43.14	451.3	46.02
22.2	7/8	22.64	23.09	1.65	2.076	430.8	43.93	459.5	46.86
23		23.46	23.92	1.71	2.228	462.5	47.16	493.2	50.29
24		24.48	24.96	1.78	2.426	503.5	51.34	537.0	54.76
25		25.50	26.00	1.86	2.633	546.4	55.72	582.7	59.42
25.4	1	25.91	26.42	1.89	2.718	564.0	57.51	601.5	61.34
26		26.52	27.04	1.93	2.848	591.0	60.27	630.3	64.27
27		27.54	28.08	2.01	3.071	637.3	64.99	679.7	69.31
28		28.56	29.12	2.08	3.303	685.4	69.89	731.0	74.54
28.6	1-1/8	29.17	29.74	2.13	3.446	715.1	72.92	762.6	77.76
29		29.58	30.16	2.16	3.543	735.2	74.97	784.1	79.96
30		30.60	31.20	2.23	3.791	786.8	80.23	839.1	85.56
31		31.62	32.24	2.31	4.048	840.1	85.67	896.0	91.37
31.8	1-1/4	32.44	33.07	2.36	4.260	884.0	90.14	942.9	96.15
32		32.64	33.28	2.38	4.314	895.2	91.28	954.8	97.36
33		33.66	34.32	2.45	4.587	952.0	97.08	1015	103.5
33.5		34.17	34.84	2.49	4.727	981.1	100.0	1046	106.7
34		34.68	35.36	2.53	4.870	1011	103.1	1078	109.9
34.9	1-3/8	35.60	36.30	2.60	5.131	1065	108.6	1136	115.8
35		35.70	36.40	2.60	5.160	1071	109.2	1142	116.5
36		36.72	37.44	2.68	5.459	1133	115.5	1208	123.2

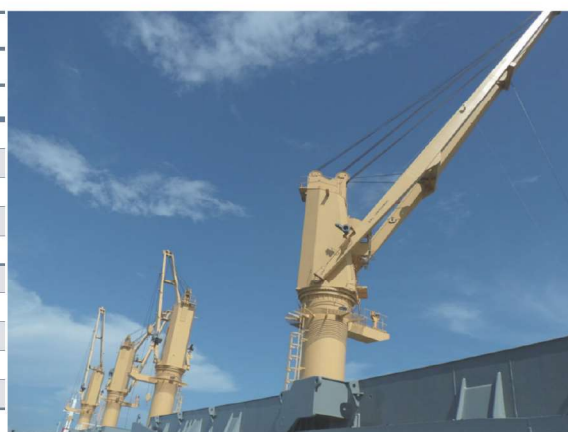

钢丝绳 公称直径		直径公差 最小 最大		外层丝 直径	公制单位						
					单位重量	最小破断力					
						1770级		1960级		2160级	
mm	inches	mm	mm	mm	kg/m	kN	t(M)	kN	t(M)	kN	t(M)
8		8.16	8.32	0.42	0.313	52.84	5.39	61.08	6.23	62.75	6.40
9		9.18	9.36	0.48	0.397	66.88	6.82	77.30	7.88	79.42	8.10
10		10.20	10.40	0.53	0.490	82.56	8.42	95.43	9.73	98.04	10.00
11		11.22	11.44	0.58	0.593	99.9	10.19	115.5	11.77	118.6	12.10
12		12.24	12.48	0.64	0.705	118.9	12.12	137.4	14.01	141.2	14.40
12.7	1/2	12.95	13.21	0.67	0.790	133.2	13.58	153.9	15.70	158.1	16.13
13		13.26	13.52	0.69	0.828	139.5	14.23	161.3	16.45	165.7	16.90
14		14.28	14.56	0.74	0.960	161.8	16.50	187.0	19.07	192.2	19.60
14.3	9/16	14.59	14.87	0.76	1.002	168.5	17.18	195.1	19.90	200.5	20.44
15		15.30	15.60	0.80	1.102	185.8	18.95	214.7	21.89	220.6	22.49
15.9	5/8	16.22	16.54	0.84	1.238	208.7	21.28	241.3	24.60	247.9	25.27
16		16.32	16.64	0.85	1.254	211.4	21.56	244.3	24.91	251.0	25.59
17		17.34	17.68	0.90	1.415	238.6	24.33	275.8	28.12	283.3	28.89
18		18.36	18.72	0.96	1.587	267.5	27.28	309.2	31.53	317.7	32.39
19		19.38	19.76	1.01	1.768	298.1	30.40	344.5	35.13	353.9	36.09
19.1	3/4	19.48	19.86	1.01	1.787	301.2	30.71	348.1	35.50	357.7	36.47
20		20.40	20.80	1.06	1.959	330.2	33.67	381.7	38.92	392.2	39.99
21		21.42	21.84	1.12	2.160	364.1	37.13	420.8	42.91	432.4	44.09
22		22.44	22.88	1.17	2.371	399.6	40.75	461.9	47.10	474.5	48.39
22.2	7/8	22.64	23.09	1.18	2.414	407.8	41.58	470.3	47.96	483.2	49.27
23		23.46	23.92	1.22	2.591	436.8	44.54	504.8	51.48	518.6	52.89
24		24.48	24.96	1.27	2.821	475.6	48.50	549.7	56.05	564.7	57.59
25		25.50	26.00	1.33	3.061	516.0	52.62	596.4	60.82	612.8	62.49
25.4	1	25.91	26.42	1.35	3.160	532.7	54.32	615.7	62.78	632.5	64.50
26		26.52	27.04	1.38	3.311	558.1	56.91	645.1	65.78	662.8	67.58
27		27.54	28.08	1.43	3.571	601.9	61.38	695.7	70.94	714.7	72.88
28		28.56	29.12	1.49	3.840	647.3	66.01	748.2	76.29	768.7	78.38
28.6	1-1/8	29.17	29.74	1.52	4.006	674.1	68.74	780.6	79.60	802.0	81.78
29		29.58	30.16	1.54	4.119	694.3	70.80	802.6	81.84	824.5	84.08
30		30.60	31.20	1.59	4.408	743.1	75.78	858.9	87.58	882.4	89.98
31		31.62	32.24	1.65	4.707	793.4	80.90	917.1	93.52	942.2	96.08
31.8	1-1/4	32.44	33.07	1.69	4.953	832.3	84.87	965.0	98.40	991.5	101.1
32		32.64	33.28	1.70	5.015	845.4	86.21	977.2	99.65	1004	102.4
33		33.66	34.32	1.75	5.334	899.1	91.68	1039	106.0	1068	108.9
33.5		34.17	34.84	1.78	5.497	927.0	94.53	1071	109.2	1100	112.2
34		34.68	35.36	1.81	5.662	954.0	97.28	1103	112.5	1133	115.6
34.9	1-3/8	35.60	36.30	1.85	5.966	1006	102.6	1162	118.5	1194	121.8
35		35.70	36.40	1.86	6.000	1011	103.1	1169	119.2	1201	122.5
35.5		36.21	36.92	1.89	6.172	1040	106.1	1203	122.6	1236	126.0
36		36.72	37.44	1.91	6.348	1070	109.1	1237	126.1	1271	129.6
37		37.74	38.48	1.96	6.705	1130	115.2	1306	133.2	1342	136.9
37.5		38.25	39.00	1.99	6.888	1161	118.4	1342	136.8	1379	140.6
38		38.76	39.52	2.02	7.072	1192	121.6	1378	140.5	1416	144.4
38.1	1-1/2	38.86	39.62	2.02	7.110	1198	122.2	1385	141.3	1423	145.1
39		39.78	40.56	2.07	7.450	1256	128.1	1451	148.0	1491	152.1
40		40.80	41.60	2.12	7.837	1321	134.7	1527	155.7	1569	160.0
41		41.82	42.64	2.18	8.233	1388	141.5	1604	163.6	1648	168.1
41.3	1-5/8	42.13	42.95	2.19	8.354	1408	143.6	1628	166.0	1672	170.5
42		42.84	43.68	2.23	8.640	1456	148.5	1683	171.7	1729	176.4
42.5		43.35	44.20	2.26	8.847	1491	152.0	1724	175.8	1771	180.6
43		43.86	44.72	2.28	9.056	1527	155.7	1764	179.9	1813	184.9
44		44.88	45.76	2.34	9.482	1598	163.0	1848	188.4	1898	193.6
44.5	1-3/4	45.39	46.28	2.36	9.699	1635	166.7	1890	192.7	1941	198.0
45		45.90	46.80	2.39	9.918	1672	170.5	1932	197.1	1985	202.5
46		46.92	47.84	2.44	10.36	1747	178.1	2019	205.9	2075	211.5
47		47.94	48.88	2.50	10.82	1824	186.0	2108	215.0	2166	220.8
47.6	1-7/8	48.55	49.50	2.53	11.10	1871	190.8	2162	220.5	2221	226.5
48		48.96	49.92	2.55	11.29	1902	194.0	2199	224.2	2259	230.3
49		49.98	50.96	2.60	11.76	1982	202.1	2291	233.6	2354	240.0
50		51.00	52.00	2.66	12.25	2064	210.5	2386	243.3	2451	249.9
50.8	2	51.82	52.83	2.70	12.64	2131	217.3	2463	251.1	2530	258.0
51		52.02	53.04	2.71	12.74	2147	218.9	2482	253.1	2550	260.0
52		53.04	54.08	2.76	13.24	2232	227.6	2580	263.1	2651	270.3

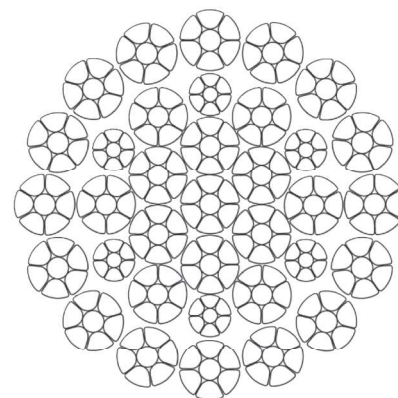

PW 16K有很高的破断拉力和结构稳定性

PW 16K have very high breaking force and structural stability.

钢丝绳完全润滑，可由镀锌和非镀锌的钢丝制成


The wire rope is fully lubricated, it can be made from galvanized and non galvanized wire.


与卷筒间有极好的抗挤压性

It has excellent extrusion resistance with the drum.

非旋转钢丝绳，应配合应力释放器使用

not rotation wire rope, shall be used with Swivel.

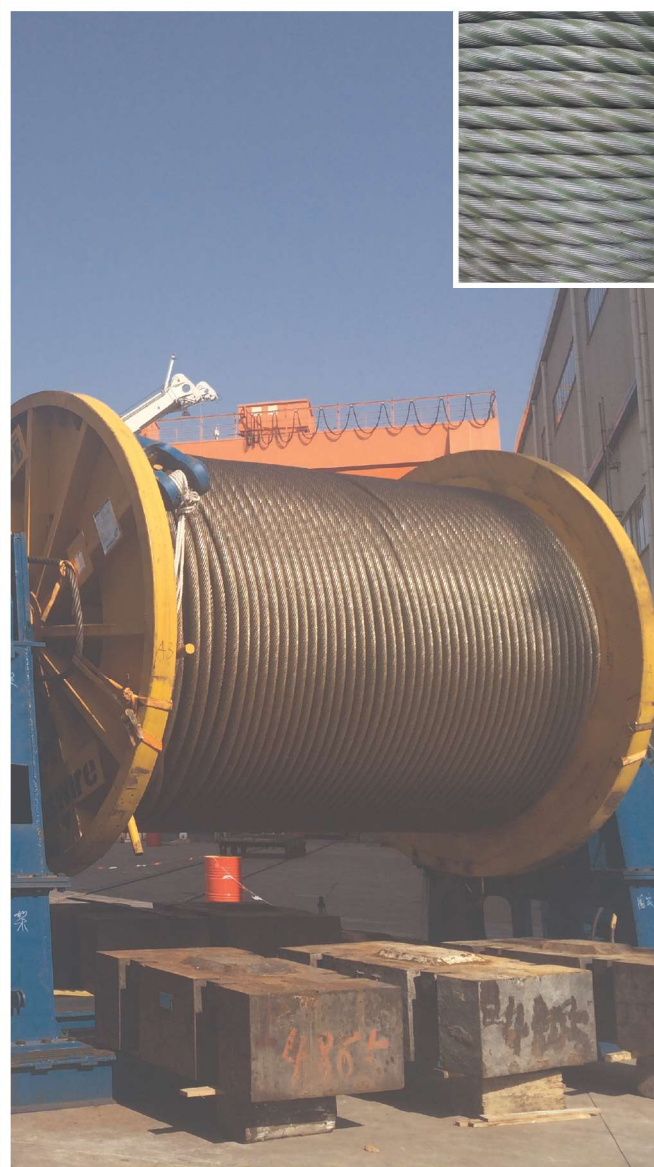

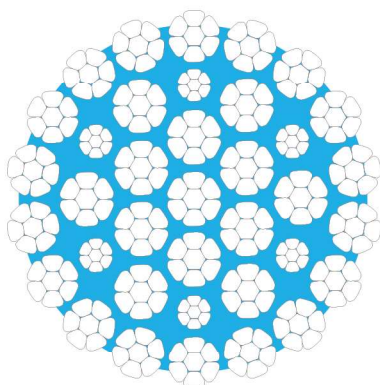

PW 18K有很高的破断拉力和结构稳定性

PW 18K have very high breaking force and structural stability.

钢丝绳完全润滑，可由镀锌和非镀锌的钢丝制成

The wire rope is fully lubricated, it can be made from galvanized and non galvanized wire.

与卷筒间有极好的抗挤压性

It has excellent extrusion resistance with the drum.


非旋转钢丝绳，应配合应力释放器使用

Non rotation wire rope, shall be used with Swivel.

钢丝绳 公称直径		直径公差		外层丝 直径	单位 重量	公制单位			
						最小破断力			
		最小	最大			1960级		2160级	
mm	inches	mm	mm	mm	kg/m	kN	t(M)	kN	t(M)
12		12.24	12.48	0.59	0.702	135.9	13.86	142.1	14.49
12.7	1/2	12.95	13.21	0.63	0.786	152.2	15.53	159.2	16.23
13		13.26	13.52	0.64	0.824	159.5	16.27	166.8	17.01
14		14.28	14.56	0.69	0.955	185.0	18.87	193.5	19.73
14.3	9/16	14.59	14.87	0.70	1.097	193.0	19.68	201.8	20.58
15		15.30	15.60	0.74	1.232	212.4	21.66	222.1	22.65
15.9	5/8	16.22	16.54	0.78	1.248	238.6	24.33	249.5	25.45
16		16.32	16.64	0.79	1.408	241.7	24.65	252.7	25.77
17		17.34	17.68	0.84	1.579	272.8	27.82	285.3	29.09
18		18.36	18.72	0.89	1.759	305.8	31.18	319.8	32.61
19		19.38	19.76	0.94	1.778	340.8	34.75	356.3	36.33
19.1	3/4	19.48	19.86	0.94	1.949	344.4	35.12	360.1	36.72
20		20.40	20.80	0.98	2.149	377.6	38.50	394.8	40.26
21		21.42	21.84	1.03	2.359	416.3	42.45	435.3	44.39
22		22.44	22.88	1.08	2.402	456.9	46.59	477.7	48.71
22.2	7/8	22.64	23.09	1.09	2.578	473.6	48.29	495.3	50.51
23		23.46	23.92	1.13	2.807	499.3	50.91	522.2	53.25
24		24.48	24.96	1.18	3.046	543.7	55.44	568.6	57.98
25		25.50	26.00	1.23	3.144	590.0	60.16	616.9	62.91
25.4	1	25.91	26.42	1.25	3.294	609.0	62.10	636.8	64.94
26		26.52	27.04	1.28	3.553	638.1	65.07	667.3	68.05
27		27.54	28.08	1.33	3.821	688.1	70.17	719.6	73.38
28		28.56	29.12	1.38	3.986	740.1	75.47	773.9	78.92
28.6	1-1/8	29.17	29.74	1.41	4.099	772.1	78.73	807.4	82.33
29		29.58	30.16	1.43	4.386	793.9	80.96	830.1	84.65
30		30.60	31.20	1.48	4.683	849.6	86.64	888.4	90.59
31		31.62	32.24	1.53	4.928	907.1	92.50	948.6	96.73
31.8	1-1/4	32.44	33.07	1.57	4.990	954.6	97.34	998.2	101.8
32		32.64	33.28	1.57	5.307	966.6	98.57	1011	103.1
33		33.66	34.32	1.62	5.634	1028	104.8	1075	109.6
34		34.68	35.36	1.67	5.936	1091	111.3	1141	116.3
34.9	1-3/8	35.60	36.30	1.72	5.970	1150	117.3	1202	122.6
35		35.70	36.40	1.72	6.316	1156	117.9	1209	123.3
36		36.72	37.44	1.77	7.037	1223	124.7	1279	130.4
38		38.76	39.52	1.87	7.074	1363	139.0	1425	145.3
38.1	1-1/2	38.86	39.62	1.88	7.797	1370	139.7	1433	146.1
40		40.80	41.60	1.97	8.313	1510	154.0	1579	161.0
41.3	1-5/8	42.13	42.95	2.03	8.597	1610	164.2	1684	171.7
42		42.84	43.68	2.07	9.011	1665	169.8	1741	177.5
43		43.86	44.72	2.12	9.435	1745	177.9	1825	186.1
44		44.88	45.76	2.17	9.651	1827	186.3	1911	194.9
44.5	1-3/4	45.39	46.28	2.19	9.869	1869	190.6	1955	199.4
45		45.90	46.80	2.21	10.31	1911	194.9	1999	203.8
46		46.92	47.84	2.26	11.04	1997	203.6	2089	213.0
47.6	1-7/8	48.55	49.50	2.34	11.23	2139	218.1	2236	228.0
48		48.96	49.92	2.36	12.18	2175	221.8	2274	231.9
50		51.00	52.00	2.46	13.18	2360	240.7	2468	251.7
52		53.04	54.08	2.56	13.49	2552	260.3	2669	272.2




钢丝绳 公称直径		直径公差		外层丝 直径	公制单位						
					单位重量	最小破断力					
		最小	最大			1770级	1960级		2160级		
mm	inches	mm	mm	mm	kg/m	kN	t(M)	kN	t(M)	kN	t(M)
8		8.16	8.32	0.45	0.269	43.34	4.42	48.20	4.92	53.00	5.40
9		9.18	9.36	0.50	0.341	54.85	5.59	60.90	6.21	67.00	6.83
10		10.20	10.40	0.56	0.421	67.72	6.91	75.20	7.67	82.70	8.43
11		11.22	11.44	0.61	0.509	81.94	8.36	90.99	9.28	100.1	10.20
12		12.24	12.48	0.64	0.557	89.60	9.14	108.9	11.10	117.7	12.00
12.7	1/2	12.95	13.21	0.71	0.679	109.2	11.14	121.5	12.39	131.6	13.42
13		13.26	13.52	0.73	0.711	114.4	11.67	127.3	12.98	137.9	14.06
14		14.28	14.56	0.78	0.825	132.7	13.53	147.1	15.00	158.9	16.20
14.3	9/16	14.59	14.87	0.80	0.859	138.2	14.09	153.5	15.65	165.8	16.91
15		15.30	15.60	0.84	0.947	152.4	15.54	168.9	17.22	182.4	18.60
15.9	5/8	16.22	16.54	0.89	1.064	171.2	17.46	189.8	19.35	205.3	20.94
16		16.32	16.64	0.89	1.077	173.4	17.68	192.2	19.60	207.9	21.20
17		17.34	17.68	0.95	1.216	195.7	19.96	217.0	22.13	234.7	23.93
18		18.36	18.72	1.00	1.363	219.4	22.37	243.2	24.80	263.8	26.90
19		19.38	19.76	1.06	1.519	244.5	24.93	273.6	27.90	296.2	30.20
19.1	3/4	19.48	19.86	1.07	1.535	247.0	25.19	276.5	28.19	299.3	30.52
20		20.40	20.80	1.12	1.683	270.9	27.62	300.1	30.60	325.6	33.20
21		21.42	21.84	1.17	1.856	298.6	30.45	330.9	33.74	359.0	36.61
22		22.44	22.88	1.23	2.037	327.7	33.42	363.1	37.03	394.0	40.17
22.2	7/8	22.64	23.09	1.24	2.079	334.5	34.11	369.8	37.70	401.2	40.91
23		23.46	23.92	1.28	2.226	358.2	36.53	397.0	40.49	430.1	43.86
24		24.48	24.96	1.34	2.424	390.0	39.77	432.5	44.10	468.8	47.80
25		25.50	26.00	1.39	2.630	423.2	43.15	469.7	47.90	509.9	52.00
25.4	1	25.91	26.42	1.42	2.715	436.9	44.55	484.9	49.44	526.3	53.67
26		26.52	27.04	1.45	2.845	457.8	46.68	508.0	51.80	551.1	56.20
27		27.54	28.08	1.51	3.068	493.6	50.33	547.8	55.86	594.3	60.60
28		28.56	29.12	1.56	3.299	530.9	54.14	589.4	60.10	639.4	65.20
28.6	1-1/8	29.17	29.74	1.59	3.436	552.9	56.38	614.9	62.71	667.1	68.02
29		29.58	30.16	1.62	3.539	569.5	58.07	632.3	64.47	685.9	69.94
30		30.60	31.20	1.67	3.787	609.4	62.14	676.7	69.00	744.3	75.90
31		31.62	32.24	1.73	4.044	650.7	66.35	722.6	73.68	794.7	81.04
31.8	1-1/4	32.44	33.07	1.77	4.242	682.6	69.61	760.6	77.56	847.3	86.40
32		32.64	33.28	1.79	4.309	693.4	70.71	770.2	78.54	858.0	87.49
33		33.66	34.32	1.84	4.583	737.4	75.19	819.1	83.52	928.7	94.70
34		34.68	35.36	1.90	4.865	782.8	79.82	869.8	88.69	931.6	95.00
34.9	1-3/8	35.60	36.30	1.95	5.126	824.8	84.11	916.5	93.45	981.6	100.1
35		35.70	36.40	1.95	5.155	829.5	84.59	921.7	93.99	987.2	100.7
36		36.72	37.44	2.01	5.454	877.6	89.49	951.2	97.00	1072	109.3
38		38.76	39.52	2.12	6.077	978.0	99.73	1082	110.3	1194	121.8
38.1	1-1/2	38.86	39.62	2.13	6.109	983.0	100.2	1087	110.9	1201	122.4
40		40.80	41.60	2.23	6.733	1080	110.1	1198	122.2	1323	135.0
41.3	1-5/8	42.13	42.95	2.30	7.178	1155	117.8	1278	130.3	1411	143.9
42		42.84	43.68	2.34	7.423	1195	121.9	1285	131.0	1459	148.8
44		44.88	45.76	2.45	8.147	1311	133.7	1458	148.7	1601	163.3
44.5	1-3/4	45.39	46.28	2.48	8.333	1341	136.7	1492	152.1	1638	167.0
45		45.90	46.80	2.51	8.522	1370	139.7	1530	156.0	1675	170.8
46		46.92	47.84	2.57	8.905	1433	146.1	1599	163.0	1750	178.5
47.6	1-7/8	48.55	49.50	2.66	9.535	1534	156.4	1707	174.1	1874	191.1
48		48.96	49.92	2.68	9.696	1560	159.1	1736	177.0	1906	194.3
50		51.00	52.00	2.79	10.52	1693	172.6	1883	192.0	2068	210.9
50.8	2	51.82	52.83	2.83	10.86	1747	178.1	1944	198.2	2135	217.7
52		53.04	54.08	2.90	11.38	1831	186.7	2030	207.0	2237	228.1
54	2-1/8	55.08	56.16	3.01	12.27	1975	201.4	2158	220.0	2412	245.9
56		57.12	58.24	3.12	13.20	2120	216.2	2363	241.0	2594	264.5
57.2	2-1/4	58.34	59.49	3.18	13.77	2216	226.0	2466	251.4	2706	276.0
58		59.16	60.32	3.24	14.16	2278	232.3	2535	258.5	2782	283.7
60		61.20	62.40	3.35	15.15	2440	248.8	2713	276.7	2978	303.6
62		63.24	64.48	3.46	16.18	2603	265.4	2897	295.4	3180	324.2
64		65.28	66.56	3.57	17.24	2774	282.9	3087	314.8	3388	345.5

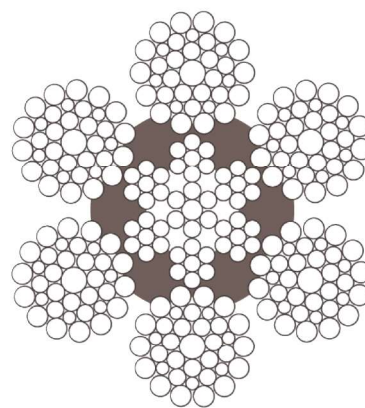


PW 6R有很优的结构稳定性，高性价比
PW 6R have very high structural stability, high cost performance.

钢丝绳完全润滑，可由镀锌和非镀锌的钢丝制成
The wire rope is fully lubricated, it can be made from galvanized and non galvanized wire.

旋转钢丝绳，不应配合应力释放器使用
Rotation wire rope, shall not be used with Swivel.

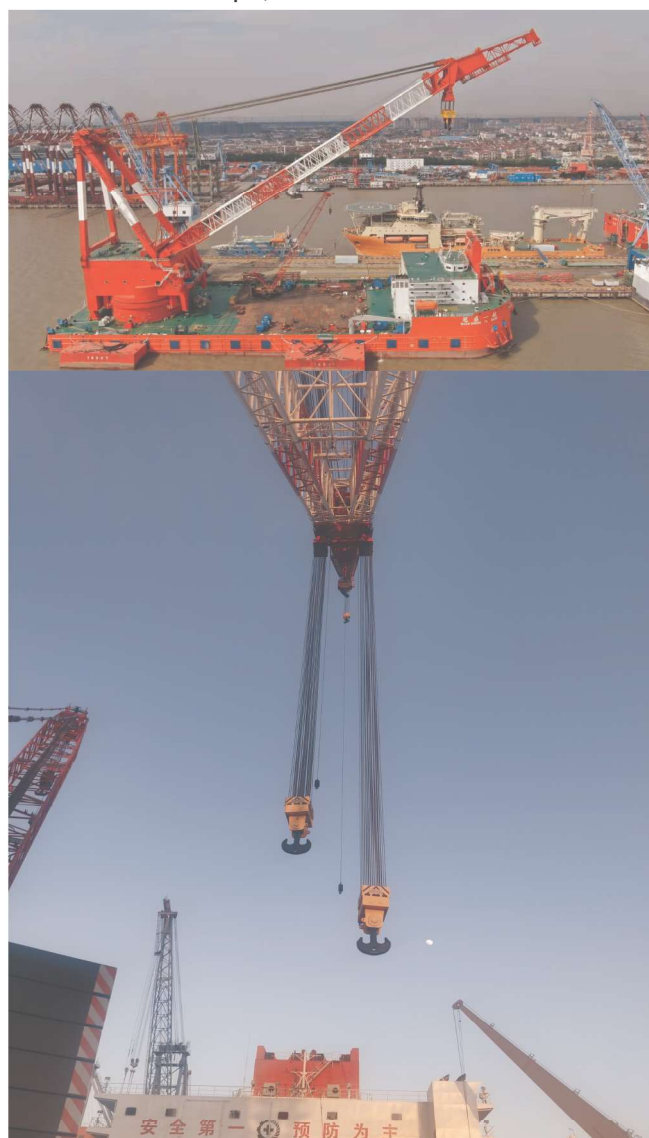

钢丝绳 公称直径		直径公差		外层丝 直径	公制单位				
					单位 重量	最小破断力			
		最小	最大			177级		196级	
mm	inches	mm	mm	mm	kg/m	kN	t(M)	kN	t(M)
8		8.16	8.32	0.48	0.276	47.87	4.88	53.01	5.41
9		9.18	9.36	0.54	0.349	60.58	6.18	67.09	6.84
10		10.20	10.40	0.60	0.431	74.79	7.63	82.82	8.45
11		11.22	11.44	0.66	0.522	90.50	9.23	100.2	10.22
12		12.24	12.48	0.71	0.621	107.7	10.98	119.3	12.16
12.7	1/2	12.95	13.21	0.76	0.695	120.6	12.30	133.6	13.62
13		13.26	13.52	0.77	0.729	126.4	12.89	140.0	14.27
14		14.28	14.56	0.83	0.845	146.6	14.95	162.3	16.55
14.3	9/16	14.59	14.87	0.85	0.882	152.9	15.60	169.4	17.27
15		15.30	15.60	0.89	0.970	168.3	17.16	186.3	19.00
15.9	5/8	16.22	16.54	0.95	1.090	189.1	19.28	209.4	21.35
16		16.32	16.64	0.95	1.104	191.5	19.52	212.0	21.62
17		17.34	17.68	1.01	1.246	216.2	22.04	239.4	24.41
18		18.36	18.72	1.07	1.397	242.3	24.71	268.3	27.36
19		19.38	19.76	1.13	1.557	270.0	27.53	299.0	30.49
19.1	3/4	19.48	19.86	1.14	1.573	272.9	27.82	302.1	30.81
20		20.40	20.80	1.19	1.725	299.2	30.51	331.3	33.78
21		21.42	21.84	1.25	1.902	329.8	33.63	365.2	37.24
22		22.44	22.88	1.31	2.087	362.0	36.91	400.9	40.88
22.2	7/8	22.64	23.09	1.32	2.125	368.6	37.59	408.2	41.62
23		23.46	23.92	1.37	2.281	395.7	40.35	438.1	44.68
24		24.48	24.96	1.43	2.484	430.8	43.93	477.1	48.65
25		25.50	26.00	1.49	2.695	467.5	47.67	517.6	52.78
25.4	1	25.91	26.42	1.51	2.782	482.5	49.20	534.3	54.49
26		26.52	27.04	1.55	2.915	505.6	51.56	559.9	57.09
27		27.54	28.08	1.61	3.143	545.2	55.60	603.8	61.57
28		28.56	29.12	1.67	3.380	586.4	59.79	649.3	66.21
28.6	1 1/8	29.17	29.74	1.70	3.527	611.8	62.38	677.4	69.08
29		29.58	30.16	1.73	3.626	629.0	64.14	696.5	71.03
30		30.60	31.20	1.79	3.881	673.1	68.64	745.4	76.01
31		31.62	32.24	1.85	4.144	718.8	73.29	795.9	81.16
31.8	1-1/4	32.44	33.07	1.89	4.360	756.3	77.13	837.5	85.40
32		32.64	33.28	1.91	4.415	765.9	78.10	848.1	86.48
33		33.66	34.32	1.97	4.696	814.5	83.06	901.9	91.97
34		34.68	35.36	2.03	4.984	864.6	88.17	957.4	97.63
34.9	1-3/8	35.60	36.30	2.08	5.252	911.0	92.89	1009	102.9
35		35.70	36.40	2.08	5.282	916.2	93.43	1015	103.5
36		36.72	37.44	2.14	5.588	969.3	98.84	1073	109.5
38		38.76	39.52	2.26	6.226	1080	110.1	1196	122.0
38.1	1-1/2	38.86	39.62	2.27	6.259	1086	110.7	1202	122.6
40		40.80	41.60	2.38	6.899	1197	122.0	1325	135.1
41.3	1-5/8	42.13	42.95	2.46	7.355	1276	130.1	1413	144.1
42		42.84	43.68	2.50	7.606	1319	134.5	1461	149.0
44		44.88	45.76	2.27	8.348	1448	147.7	1603	163.5
44.5	1-3/4	45.39	46.28	2.30	8.539	1481	151.0	1640	167.2
45		45.90	46.80	2.33	8.731	1515	154.4	1677	171.0
46		46.92	47.84	2.38	9.124	1583	161.4	1753	178.7
47.6	1-7/8	48.55	49.50	2.46	9.770	1695	172.8	1877	191.4
48		48.96	49.92	2.48	9.934	1723	175.7	1908	194.6
50		51.00	52.00	2.28	10.78	1870	190.7	2071	211.1
50.8	2	51.82	52.83	2.32	11.13	1930	196.8	2137	217.9
52		53.04	54.08	2.37	11.66	2022	206.2	2240	228.4
54	2-1/8	55.08	56.16	2.46	12.57	2181	222.4	2415	246.3
56		57.12	58.24	2.55	13.52	2346	239.2	2597	264.8
57.2	2-1/4	58.34	59.49	2.61	14.11	2447	249.5	2710	276.3
58		59.16	60.32	2.64	14.51	2516	256.6	2786	284.1
60		61.20	62.40	2.73	15.52	2693	274.6	2982	304.0

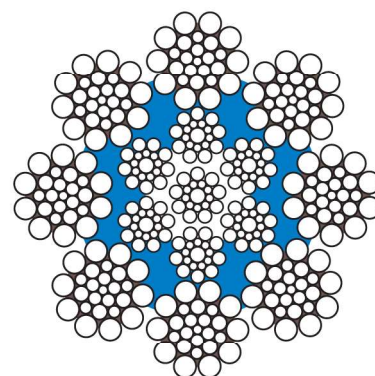

PW 8R有很高的柔韧性和结构稳定性


PW 8R have very high flexibility and structural stability.


钢丝绳完全润滑，可由镀锌和非镀锌的钢丝制成
The wire rope is fully lubricated, it can be made form galvanized and non galvanized wire.

与卷筒间有极好的抗挤压性，弯曲性能好
It has excellent extrusion resistance with the drum, and high bending performance.

旋转钢丝绳，不应配合应力释放器使用

Rotation wire rope, shall not be used with Swivel.

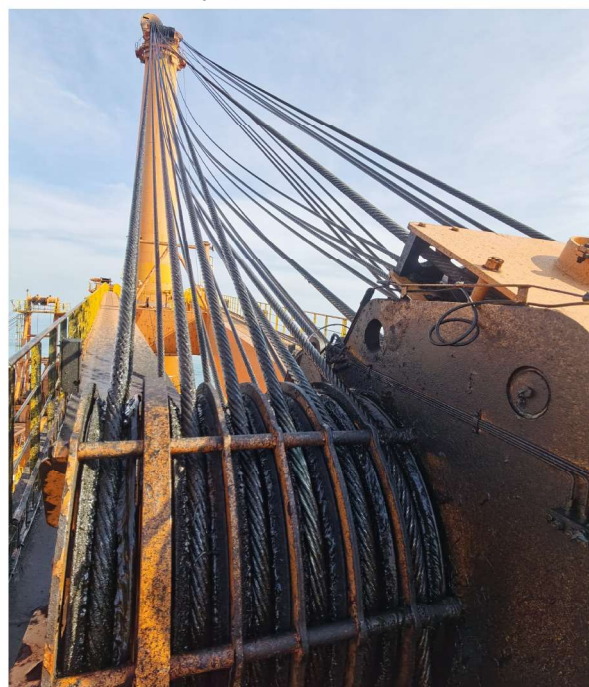

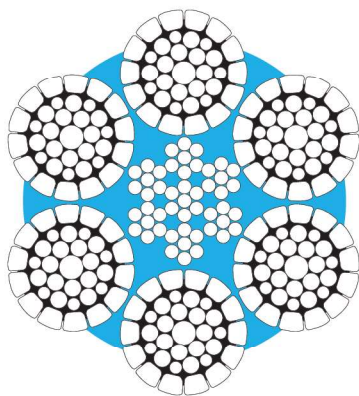

PW 6K有很高的破断拉力和结构稳定性

PW 6K have very high breaking force and structural stability.

钢丝绳完全润滑，可由镀锌和非镀锌的钢丝制成

The wire rope is fully lubricated, it can be made from galvanized and non galvanized wire.

与卷筒间有极好的抗挤压性

It has excellent extrusion resistance with the drum.


旋转钢丝绳，不应配合应力释放器使用

Rotation wire rope, shall not be used with Swivel.

钢丝绳 公称直径		直径公差		外层丝 直径	公制单位						
					单位重量	最小破断力					
		最小	最大			1770级		1960级		2160级	
mm	inches	mm	mm	mm	kg/m	kN	t(M)	kN	t(M)	kN	t(M)
8		8.16	8.32	0.47	0.294	49.52	5.05	53.63	5.47	57.40	5.85
9		9.18	9.36	0.52	0.373	62.67	6.39	67.87	6.92	72.60	7.40
10		10.20	10.40	0.58	0.460	77.37	7.89	83.80	8.55	89.60	9.14
11		11.22	11.44	0.64	0.557	93.62	9.55	101.4	10.34	105.1	10.73
12		12.24	12.48	0.70	0.662	111.4	11.36	120.7	12.31	126.0	12.85
12.7	1/2	12.95	13.21	0.74	0.742	124.8	12.73	135.2	13.79	140.0	14.28
13		13.26	13.52	0.76	0.777	130.8	13.34	141.6	14.44	147.0	14.99
14		14.28	14.56	0.81	0.901	151.6	15.46	164.2	16.74	171.6	17.50
14.3	9/16	14.59	14.87	0.83	0.939	157.9	16.10	171.1	17.45	179.0	18.25
15		15.30	15.60	0.87	1.035	174.1	17.75	188.5	19.22	197.0	20.08
15.9	5/8	16.22	16.54	0.92	1.163	195.6	19.95	211.8	21.60	221.2	22.56
16		16.32	16.64	0.93	1.177	198.1	20.20	214.5	21.87	224.0	22.84
17		17.34	17.68	0.99	1.329	223.6	22.80	242.2	24.70	252.9	25.79
18		18.36	18.72	1.05	1.490	250.7	25.56	271.5	27.69	283.0	28.86
19		19.38	19.76	1.11	1.660	279.3	28.48	302.5	30.85	315.7	32.19
19.1	3/4	19.48	19.86	1.11	1.678	282.2	28.78	305.7	31.17	319.0	32.53
20		20.40	20.80	1.16	1.840	309.5	31.56	335.2	34.18	349.0	35.59
21		21.42	21.84	1.22	2.028	341.2	34.79	369.5	37.68	384.8	39.24
22		22.44	22.88	1.28	2.226	374.5	38.19	405.6	41.36	424.0	43.24
22.2	7/8	22.64	23.09	1.29	2.272	382.2	38.97	413.9	42.21	436.0	44.46
23		23.46	23.92	1.34	2.433	409.3	41.74	443.3	45.20	468.0	47.72
24		24.48	24.96	1.40	2.649	445.6	45.44	482.7	49.22	504.0	51.39
25		25.50	26.00	1.45	2.875	483.6	49.31	523.7	53.40	547.0	55.78
25.4	1	25.91	26.42	1.48	2.967	499.1	50.89	540.6	55.13	565.0	57.61
26		26.52	27.04	1.51	3.109	523.0	53.33	566.5	57.77	592.0	60.37
27		27.54	28.08	1.57	3.353	564.0	57.51	610.9	62.29	638.4	65.10
28		28.56	29.12	1.63	3.606	606.6	61.86	657.0	67.00	686.0	69.95
28.6	1-1/8	29.17	29.74	1.66	3.756	631.7	64.42	684.2	69.77	717.0	73.11
29		29.58	30.16	1.69	3.868	650.7	66.35	704.7	71.86	737.2	75.17
30		30.60	31.20	1.74	4.139	696.3	71.00	754.2	76.91	788.0	80.35
31		31.62	32.24	1.80	4.420	743.5	75.82	805.3	82.12	842.9	85.96
31.8	1-1/4	32.44	33.07	1.85	4.636	779.9	79.53	844.7	86.14	887.0	90.45
32		32.64	33.28	1.86	4.710	792.2	80.78	858.1	87.50	897.0	91.47
33		33.66	34.32	1.92	5.009	842.5	85.91	912.5	93.05	953.9	97.27
34		34.68	35.36	1.98	5.317	894.4	91.20	968.7	98.78	1010	103.0
34.9	1-3/8	35.60	36.30	2.03	5.602	942.4	96.10	1021	104.1	1064	108.5
35		35.70	36.40	2.04	5.634	947.8	96.65	1027	104.7	1070	109.1
36		36.72	37.44	2.09	5.961	1000	102.0	1090	111.1	1132	115.5
38		38.76	39.52	2.21	6.641	1120	114.2	1210	123.4	1262	128.7
38.1	1-1/2	38.86	39.62	2.22	6.676	1126	114.8	1216	124.0	1268	129.3
40		40.80	41.60	2.33	7.359	1240	126.4	1340	136.6	1398	142.5
41.3	1-5/8	42.13	42.95	2.40	7.845	1320	134.6	1429	145.7	1490	152.0
42		42.84	43.68	2.44	8.113	1365	139.2	1478	150.7	1541	157.2
44		44.88	45.76	2.56	8.904	1500	153.0	1620	165.2	1691	172.5
44.5	1-3/4	45.39	46.28	2.59	9.108	1532	156.2	1659	169.2	1730	176.4
45		45.90	46.80	2.62	9.314	1570	160.1	1700	173.4	1769	180.4
46		46.92	47.84	2.68	9.732	1640	167.2	1770	180.5	1849	188.5
47.6	1-7/8	48.55	49.50	2.77	10.42	1753	178.8	1899	193.6	1980	201.9
48		48.96	49.92	2.79	10.60	1780	181.5	1930	196.8	2013	205.3
50		51.00	52.00	2.91	11.50	1930	196.8	2090	213.1	2184	222.7



钢丝绳 公称直径		直径公差		外层丝 直径	公制单位						
					单位重量	最小破断力					
		最小	最大			1770级		1960级		2160级	
mm	inches	mm	mm	mm	kg/m	kN	t(M)	kN	t(M)	kN	t(M)
8		8.16	8.32	0.50	0.288	52.10	5.31	57.70	5.88	60.6	6.18
9		9.18	9.36	0.57	0.364	66.00	6.73	73.00	7.44	76.7	7.82
10		10.20	10.40	0.63	0.450	81.50	8.31	90.10	9.19	94.7	9.66
11		11.22	11.44	0.69	0.544	98.60	10.05	109.1	11.13	114.6	11.69
12		12.24	12.48	0.75	0.648	117.3	11.96	129.8	13.24	136.3	13.90
12.7	1/2	12.95	13.21	0.80	0.726	131.4	13.40	145.4	14.83	152.7	15.57
13		13.26	13.52	0.82	0.760	137.7	14.04	152.3	15.53	160.0	16.32
14		14.28	14.56	0.88	0.882	159.7	16.28	176.7	18.02	185.6	18.93
14.3	9/16	14.59	14.87	0.90	0.920	166.6	16.99	184.3	18.79	193.6	19.74
15		15.30	15.60	0.94	1.012	183.3	18.69	202.8	20.68	213.0	21.72
15.9	5/8	16.22	16.54	1.00	1.137	206.0	21.01	227.9	23.24	239.4	24.41
16		16.32	16.64	1.01	1.152	208.6	21.27	230.7	23.52	242.4	24.72
17		17.34	17.68	1.07	1.300	235.5	24.01	260.5	26.56	273.6	27.90
18		18.36	18.72	1.13	1.457	264.0	26.92	292.0	29.78	306.8	31.28
19		19.38	19.76	1.19	1.624	294.2	30.00	325.4	33.18	341.8	34.85
19.1	3/4	19.48	19.86	1.20	1.641	297.3	30.32	328.8	33.53	345.4	35.22
20		20.40	20.80	1.26	1.799	325.9	33.23	360.5	36.76	378.7	38.62
21		21.42	21.84	1.32	1.984	359.3	36.64	397.5	40.53	417.5	42.57
22		22.44	22.88	1.38	2.177	394.4	40.22	436.2	44.48	458.3	46.73
22.2	7/8	22.64	23.09	1.40	2.217	401.6	40.95	444.2	45.30	466.6	47.58
23		23.46	23.92	1.45	2.380	431.0	43.95	476.8	48.62	500.9	51.08
24		24.48	24.96	1.51	2.591	469.3	47.86	519.1	52.93	545.4	55.62
25		25.50	26.00	1.57	2.812	509.3	51.93	563.3	57.44	591.8	60.35
25.4	1	25.91	26.42	1.60	2.902	525.7	53.61	581.5	59.30	610.8	62.28
26		26.52	27.04	1.63	3.041	550.8	56.17	609.3	62.13	640.0	65.26
27		27.54	28.08	1.70	3.279	594.0	60.57	657.0	67.00	690.2	70.38
28		28.56	29.12	1.76	3.527	638.8	65.14	706.6	72.05	742.3	75.69
28.6	1-1/8	29.17	29.74	1.80	3.680	666.5	67.96	737.2	75.17	774.5	78.98
29		29.58	30.16	1.82	3.783	685.3	69.88	758.0	77.29	796.3	81.20
30		30.60	31.20	1.89	4.049	733.4	74.79	811.1	82.71	852.1	86.89
31		31.62	32.24	1.95	4.323	783.1	79.85	866.1	88.32	909.9	92.78
31.8	1-1/4	32.44	33.07	2.00	4.549	824.0	84.02	911.4	92.94	957.5	97.64
32		32.64	33.28	2.01	4.606	834.4	85.09	922.9	94.11	969.5	98.86
33		33.66	34.32	2.07	4.899	887.4	90.49	981.5	100.1	1031	105.1
34		34.68	35.36	2.14	5.200	941.9	96.05	1042	106.3	1095	111.7
34.9	1-3/8	35.60	36.30	2.19	5.479	992.5	101.2	1098	112.0	1153	117.6
35		35.70	36.40	2.20	5.511	998.2	101.8	1104	112.6	1160	118.3
36		36.72	37.44	2.26	5.830	1056	107.7	1168	119.1	1227	125.1
38		38.76	39.52	2.39	6.496	1177	120.0	1301	132.7	1367	139.4
38.1	1-1/2	38.86	39.62	2.39	6.530	1183	120.6	1308	133.4	1374	140.1
40		40.80	41.60	2.51	7.198	1304	133.0	1442	147.0	1515	154.5
41.3	1-5/8	42.13	42.95	2.60	7.673	1390	141.7	1537	156.7	1615	164.7
42		42.84	43.68	2.64	7.935	1437	146.5	1590	162.1	1670	170.3
44		44.88	45.76	2.38	8.709	1578	160.9	1745	177.9	1833	186.9
44.5	1-3/4	45.39	46.28	2.40	8.908	1614	164.6	1785	182.0	1875	191.2
45		45.90	46.80	2.43	9.109	1650	168.3	1825	186.1	1917	195.5
46		46.92	47.84	2.48	9.519	1724	175.8	1907	194.5	2003	204.2
47.6	1-7/8	48.55	49.50	2.57	10.19	1846	188.2	2042	208.2	2145	218.7
48		48.96	49.92	2.59	10.36	1877	191.4	2077	211.8	2181	222.4
50		51.00	52.00	2.35	11.25	2037	207.7	2253	229.7	2367	241.4
50.8	2	51.82	52.83	2.39	11.61	2103	214.4	2326	237.2	2443	249.1
52		53.04	54.08	2.45	12.16	2203	224.6	2437	248.5	2560	261.0
54	2-1/8	55.08	56.16	2.54	13.12	2376	242.3	2628	268.0	2761	281.5
56		57.12	58.24	2.64	14.11	2555	260.5	2826	288.2		
57.2	2-1/4	58.34	59.49	2.69	14.72	2666	271.9	2949	300.7		
58		59.16	60.32	2.73	15.13	2741	279.5	3032	309.2		
60		61.20	62.40	2.82	16.19	2933	299.1	3245	330.9		

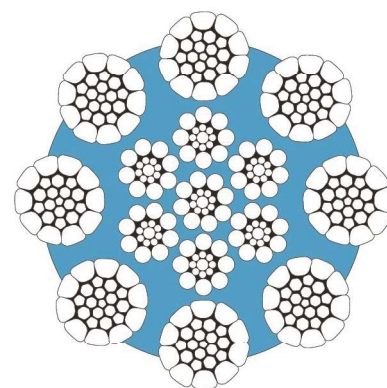

PW 8K有很高的破断拉力和结构稳定性

PW 8K have very high breaking force and structural stability.

钢丝绳完全润滑，可由镀锌和非镀锌的钢丝制成

The wire rope is fully lubricated, it can be made from galvanized and non galvanized wire.


与卷筒间有极好的抗挤压性

It has excellent extrusion resistance with the drum.

旋转钢丝绳，不应配合应力释放器使用

Rotation wire rope, shall not be used with Swivel.



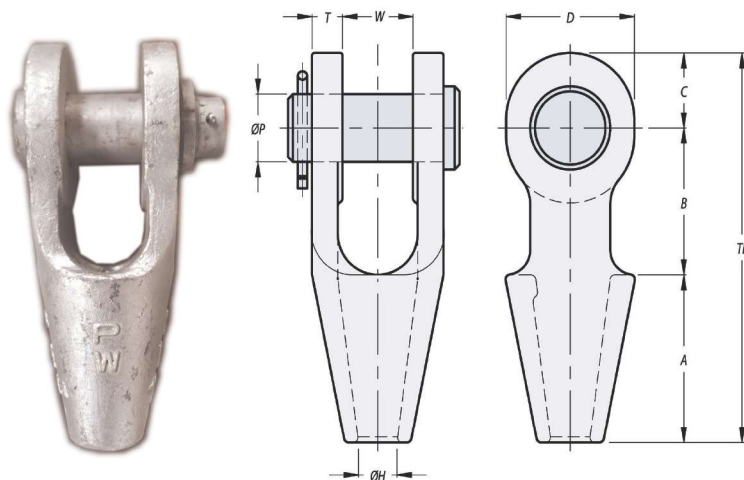


合金铸钢

Alloy OSS Socket

开式管式索节带销

(PIN / NUT 安全销/ 螺母)

型号	最小破断拉力 (吨)	钢丝绳直径		尺寸 (毫米)									重量 (千克)
		英寸	毫米	A	B	C	D	øH	øP	T	TL	W	
OSS 198	20	11 - 13	$7/16 - 1/2$	64	51	27	50	14	25	12	142	25	1
OSS 199	25	14 - 16	$9/16 - 5/8$	76	63	32	58	17,5	30	14	171	32	1,8
OSS 100	40	18 - 19	$3/4$	89	76	40	70	21	35	16	205	38	3,2
OSS 104	55	20 - 22	$7/8$	101	89	45	80	24	41	19	235	44	4,6
OSS 108	75	23 - 26	1	114	101	60	104	28	51	22	275	51	8
OSS 111	90	27 - 30	$1 1/8$	127	114	65	114	32	57	25	306	57	11
OSS 115	125	31 - 36	$1 1/4 - 1 3/8$	139	127	72	126	38	63	28	338	63	16
OSS 118	150	37 - 39	$1 1/2$	152	162	80	142	41	70	30	394	70	23
OSS 120	170	40 - 42	$1 5/8$	165	165	88	152	44	76	33	418	76	27
OSS 125	225	43 - 48	$1 3/4 - 1 7/8$	190	178	100	176	51	89	39	468	89	41
OSS 128	280	49 - 54	$2 - 2 1/8$	216	228	108	194	57	95	46	552	101	58
OSS 130	360	55 - 60	$2 1/4 - 2 3/8$	228	250	120	210	63	108	53	598	113	85
OSS 132	425	61 - 68	$2 1/2 - 2 5/8$	248	273	133	236	73	121	60	654	127	118
OSS 135	460	69 - 75	$2 3/4 - 2 7/8$	279	279	138	240	79	127	73	696	133	155
OSS 138	560	76 - 80	$3 - 3 1/8$	305	286	146	252	86	133	76	737	146	173
OSS 140	625	81 - 86	$3 1/4 - 3 3/8$	330	298	160	290	92	140	79	788	159	230
OSS 142	720	87 - 93	$3 1/2 - 3 5/8$	356	318	178	320	99	152	83	852	171	265
OSS 144	875	94 - 102	$3 3/4 - 4$	381	343	190	350	108	178	89	914	191	370
OSS 146	1200	108 - 115	$4 1/4 - 4 1/2$	450	480	215	400	125	195	100	1145	205	525
OSS 150	1300	120 - 130	$4 3/4 - 5$	500	500	280	560	138	250	110	1280	225	900

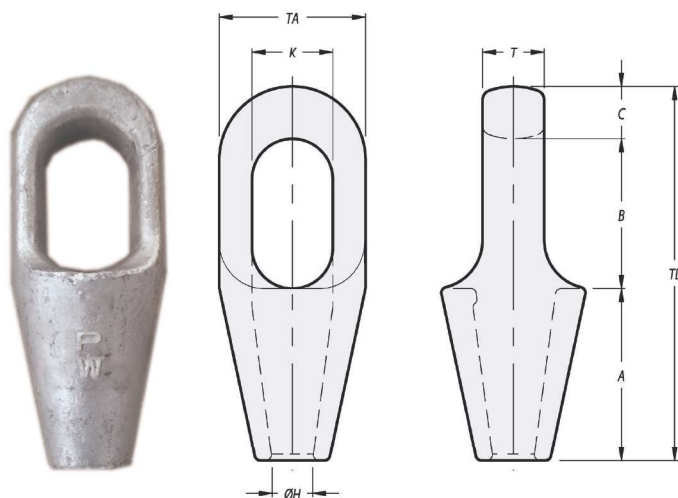


合金铸钢

Alloy Close Spl Socket

闭式管式索节

型号	最小破断拉力 (吨)	钢丝绳直径		尺寸 (毫米)								重量 (千克)
		英寸	毫米	A	B	C	ØH	K	T	TA	TL	
CSS 298	20	11 - 13	$7/16 - 1/2$	63,5	59	17,5	14	30	22,5	51	140	0,7
CSS 299	25	14 - 16	$9/16 - 5/8$	76	65	21	17,5	36	26	67	162	1,3
CSS 200	40	18 - 19	$3/4$	89	78	27	21	42	32	76	194	2,1
CSS 201	55	20 - 22	$7/8$	101	90	33	24	47	38	92	224	3,6
CSS 204	75	23 - 26	1	114	103	36	28	57	44	104	253	5,3
CSS 207	90	27 - 30	$1 1/8$	127	116	39	32	63	51	114	282	7
CSS 212	125	31 - 36	$1 1/4 - 1 3/8$	139	130	43	38	70	57	127	312	9,7
CSS 215	150	37 - 39	$1 1/2$	152	155	51	41	79	63	136	358	13
CSS 217	170	40 - 42	$1 5/8$	165	171	54	44	83	70	146	390	17
CSS 219	225	43 - 48	$1 3/4 - 1 7/8$	190	198	55	51	93	76	171	443	26
CSS 222	280	49 - 54	$2 - 2 1/8$	216	224	62	57	100	82	193	502	37,5
CSS 224	360	55 - 60	$2 1/4 - 2 3/8$	228	247	73	63	112	92	216	548	50
CSS 226	425	61 - 68	$2 1/2 - 2 5/8$	248	270	79	73	140	102	241	597	65
CSS 227	460	69 - 75	$2 3/4 - 2 7/8$	279	286	79	79	159	124	273	644	94
CSS 228	560	76 - 80	$3 - 3 1/8$	305	298	83	86	171	133	292	686	110
CSS 229	625	81 - 86	$3 1/4 - 3 3/8$	330	311	102	92	184	146	311	743	145
CSS 230	720	87 - 93	$3 1/2 - 3 5/8$	356	330	102	99	197	159	330	788	182
CSS 231	875	94 - 102	$3 3/4 - 4$	381	356	108	108	216	178	362	845	210
CSS 233	1200	108 - 115	$4 1/4 - 4 1/2$	450	425	125	125	235	190	405	1000	330
CSS 240	1300	120 - 130	$4 3/4 - 5$	500	525	125	138	260	200	450	1150	500

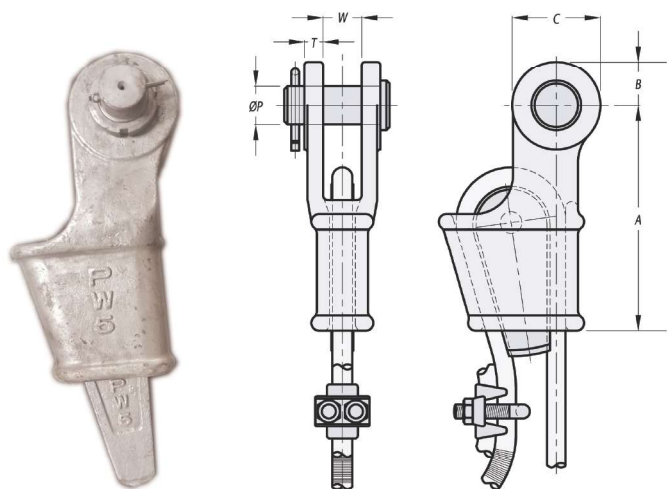

合金铸钢

Alloy Open Wedge socket

开式楔形索节

型号	最小破断拉力 (吨)	钢丝绳直径		尺寸 (毫米)							重量 (千克)
		英寸	毫米	A	B	C	ØP	T	TL	W	
PW 0,25	8	7 - 8	$\frac{5}{16}$	110	19	36	16	9	129	18	0,8
PW 0,5	12	9 - 10	$\frac{3}{8}$	142	23	46	20,6	11	165	20,5	1,7
PW 1	20	11 - 13	$\frac{1}{2}$	146	29	57	25	12	175	25	2,1
PW 2	25	14 - 16	$\frac{5}{8}$	176	35	70	30	15	211	31	4
PW 3	40	18 - 19	$\frac{3}{4}$	212	40	80	35	16	252	38	7
PW 4	55	20 - 22	$\frac{7}{8}$	240	48	95	41	19	288	44	10
PW 5	75	24 - 26	1	274	55	110	51	22	329	51	15
PW 6	90	27 - 29	$1\frac{1}{8}$	310	65	130	57	25	375	57	21
PW 7	110	30 - 32	$1\frac{1}{4}$	350	73	146	64	28	423	63	31
PW 8	125	34 - 36	$1\frac{3}{8}$	400	74	148	64	28	474	69	37
PW 9	150	37 - 39	$1\frac{1}{2}$	450	80	143	70	30	530	76	51
PW 10	170	40 - 42	$1\frac{5}{8}$	500	87	160	76	33	587	76	64
PW 11	225	43 - 48	$1\frac{3}{4} - 1\frac{7}{8}$	550	100	186	89	39	650	89	96
PW 12	280	49 - 52	2	640	105	194	95	46	745	101	130
PW 13	360	54 - 58	$2\frac{1}{4}$	660	125	230	108	54	785	114	180
PW 14	425	60 - 68	$2\frac{1}{2}$	835	135	250	121	60	970	127	275
PW 15	460	72 - 76	3	1000	150	270	133	76	1150	146	440
PW 16	625	81 - 86	$3\frac{1}{4} - 3\frac{3}{8}$	1100	152	300	140	79	1252	159	510



帕罗（上海）海洋工程有限公司

PW(SHANGHAI) OFFSHORE CO., LTD



地址：中国上海浦东金豫路100号2号楼822室（办公室）

Room 822, Building 2, No. 100 JinYu Road ,Pudong New Area ,ShangHai ,China(Office)

Tel:+86-21-3175 0913

Fax:+86-21-3175 0912

E-mail:info@pwoffshore.com

MP: +86 18621954992 郑永刚 Kevin zheng



江苏省昆山市千灯镇景红商业中心公寓259室（办公室）

259Room .Jinghong Commercial Center, Qiandeng Town,Kunshan City JiangSu(Office)

江苏宿迁泗洪双沟经济开发区便民大道88号

No 88 Convenience Road ShuangGou Town SuQian City JiangSu

Tel:+86-0527-86529908

www.pwoffshore.com